



City of Kenmore Completed Projects

Project Name: 62nd Ave NE Corridor Project Project No. T27-0196

Project Location(s): 62nd Avenue NE between SR522 (Bothell Way) and NE 187th Place

Project Completed: 2018

Project Cost: \$971,500 (\$813,200 HSIP Grant, \$158,300 Local)

Project Description: This project enhanced mobility and safety by installing a 5-6 wide sidewalk (on the east side of the street) and three traffic circles on 62nd Avenue NE from SR 522 to NE 187th Place.

Background: The project is located on a local road that accesses highway 522. The street is posted for 25 MPH, but the 85th percentile speed was about 32 MPH. Average Daily traffic (ADT) on this roadway was approximately 1200 vehicles per day. This project was designed to enhancing pedestrian and bicycle safety and mobility along the 62nd Avenue NE Corridor, where a pedestrian was struck and killed by a vehicle in 2013.

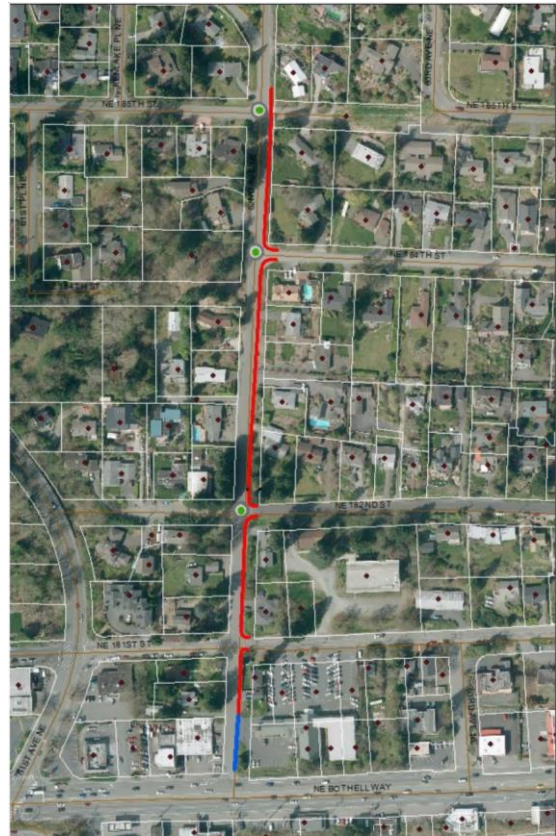


Figure 1: Project Location



Figure 2: After Project Completion



Figure 3: Preexisting Condition